


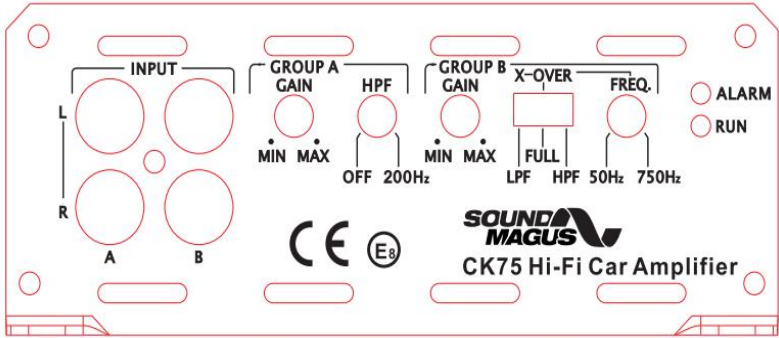

SOUNDMAGUS TECHNOLOGY CO.,LTD.

www.soundmagus.com

Email: market@soundmagus.com TEL: 0086-755-84528880 FAX:0086-755-84528881 Features

Model No.	CK75
Rated Continuous (RMS) Power @ 14.4 V	
4 Ω stereo, $\leq$ 1% THD+N	60W RMS X4
2 Ω stereo, $\leq$ 1% THD+N	95W RMS X4
4 Ω Bridged, $\leq$ 1% THD+N	190W RMS X2
General Specifications	
Frequency Response	20HZ~20KHZ(-3dB)
S/N Ratio @ Rated power	>98dB (A-weighted)
S/N Ratio @ 1 W (CEA-2006)	>80dB (A-weighted)
Channel Separation	50dB
Operating Voltage:	9- 16V DC
THD at 40hm load 30% Rated Power	<0.05%
Auto Turn On	REMOTE
Protection	Low voltage (protect < 8V), ShortCircuit, Overheat (Protect at 80C / 176F)
Input Sensitivity	0.2-5V (PRE INPUT)
Power / Ground Wire	6-4 AWG
Fuse rating	60A
Signal Processing	
	
Filter Modes	■ LPF ■ HPF
HPF	OFF~200Hz for Group A; 50Hz~750Hz for Group B
LPF	50Hz~750Hz for Group B only
Bass Boost	NO
Remote Level Control	NO
Channel Input Mode Switch	NO
Pass-Through Preamp Output Type	NO
Physical Specifications	
Height (H)	54 mm
Width (W)	140mm
Length (L)	252.5 mm