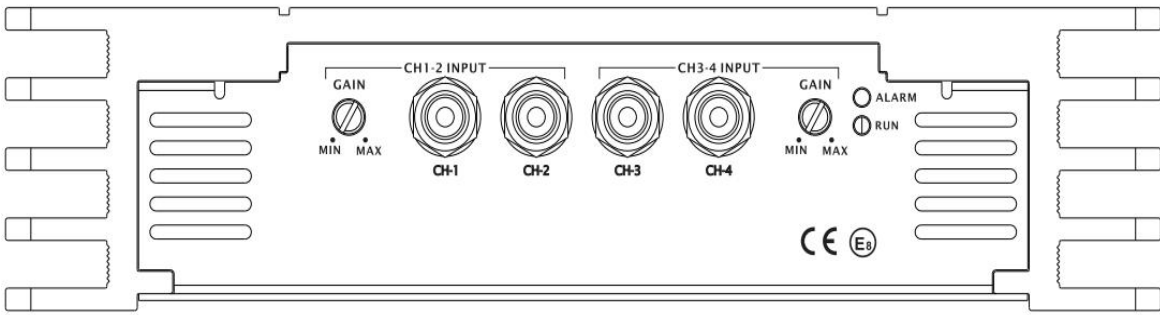


**SOUNDMAGUS TECHNOLOGY CO.,LTD.**

www.soundmagus.com

Email: market@soundmagus.com TEL: 0086-755-84528880 FAX:0086-755-84528881

Model No.	C800.4
Topology	Class AB
Rated Continuous (RMS) Power @ 14.4 V	
4 Ω stereo	150W RMS X4
2 Ω stereo	185W RMS X4
4 Ω Bridged	360W RMS X2
General Specifications	
Frequency Response	10HZ~50KHZ(-3dB)
S/N Ratio @ Rated power	>115dB (A-weighted)
S/N Ratio @ 1 W (CEA-2006)	>95dB (A-weighted)
Channel Separation	>50dB
Operating Voltage:	7.5 - 16V DC
THD+N @ Rated power	<0.05% @ 4 Ω Stereo 80watts 1K Hz
Turn On	REM
Protection	Overload, ShortCircuit, Overheat, Under voltage, Over voltage
Input Sensitivity	Low Level(PRE IN): 0.5-5V
Power / Ground Wire	4-6AWG
Fuse Rating	Recommend use external 100A fuse
	
Filter Modes	■ FULL
Remote Level Control	NO
Channel Input Mode Switch	NO
Physical Specifications	
Height (H)	54mm
Width (W)	220mm
Length (L)	328mm