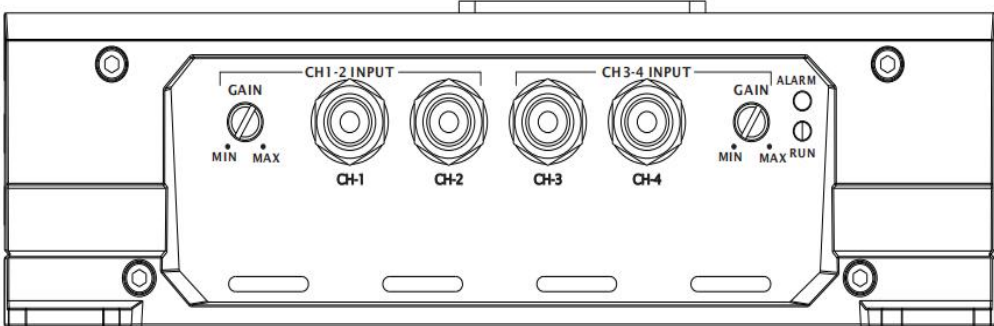


**SOUNDMAGUS TECHNOLOGY CO.,LTD.**

www.soundmagus.com

Email: market@soundmagus.com TEL: 0086-755-84528880 FAX:0086-755-84528881

Model No.	E650.4
Topology	Class AB
Rated Continuous (RMS) Power @ 14.4 V	
4 Ω stereo	115W RMS X4
2 Ω stereo	150W RMS X4
4 Ω Bridged	310W RMS X2
General Specifications	
Frequency Response	10HZ~45KHZ(-3dB)
S/N Ratio @ Rated power	>105dB (A-weighted)
S/N Ratio @ 1 W (CEA-2006)	>85dB (A-weighted)
Channel Separation	>50dB
Operating Voltage:	7.5 - 16V DC
THD+N @ Rated power	<0.02% @ 4 Ω Stereo 100watts 1KHz
Turn On	REM
Protection	Overload, ShortCircuit, Overheat, Under voltage, Over voltage
Input Sensitivity	Low Level(PRE IN): 0.5-5V
Power / Ground Wire	4-8AWG
Fuse Rating	Recommend use external 80A fuse
	
Filter Modes	■ FULL
Remote Level Control	NO
Channel Input Mode Switch	NO
Physical Specifications	
Height (H)	52mm
Width (W)	180mm
Length (L)	305mm