


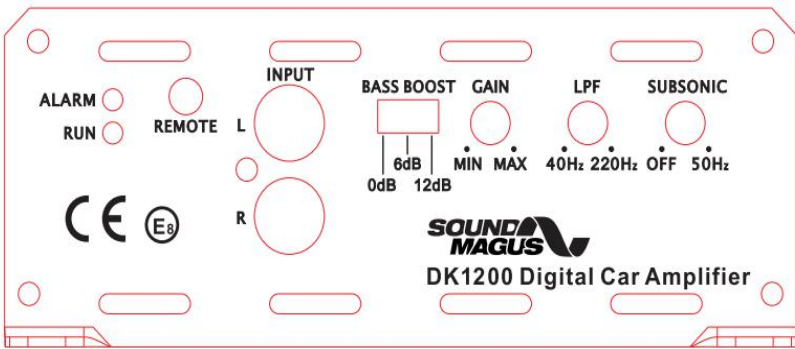

SOUNDMAGUS TECHNOLOGY CO.,LTD.

www.soundmagus.com

Email: market@soundmagus.com TEL: 0086-755-84528880 FAX:0086-755-84528881 Features

Model No.	DK1200
Rated Continuous (RMS) Power @ 14.4 V	
4 Ω , $\leq 1\%$ THD+N	400W RMS X1
2 Ω , $\leq 1\%$ THD+N	680W RMS X1
1 Ω , $\leq 1\%$ THD+N	1000W RMS X1
General Specifications	
Frequency Response	10HZ~220HZ(-3dB)
S/N Ratio @ Rated power	98dB (A-weighted)
S/N Ratio @ 1 W (CEA-2006)	75dB (A-weighted)
Operating Voltage:	9- 16V DC
THD+N @ 30% Rated power	<0.3% @ 4 Ω , 80Hz
Auto Turn On	REMOTE
Protection	Low voltage (protect < 8V), ShortCircuit, Overheat (Protect at 80C / 176F)
Input Sensitivity	0.2-5V (PRE INPUT)
Power / Ground Wire	4AWG
Fuse rating	100A
Signal Processing	
	
Filter Modes	
■ LPF ■ Subsonic	
Filter Frequency Range	Variable Subsonic 10Hz-50Hz
	Variable LPF 40Hz-220Hz
Bass Boost	0-6db-12dB switchable
Remote Level Control	YES
Channel Input Mode Switch	NO
Pass-Through Preamp Output Type	NO
Physical Specifications	
Height (H)	54 mm
Width (W)	140mm
Length (L)	258.5 mm