

# SV 165 NEO

SPL MIDRANGE

400 W





## TECHNICAL SPECIFICATIONS

Component	SPL Midrange	
Size	mm (in.)	165 (6.5)
	W peak	400
Power Handling	W continuous	150
	Impedance	Ω
Frequency Response	Hz	100 ÷ 10k
Sensitivity	dB/SPL	97
Magnet size D x d x h	mm (in.)	70 x 45 x 7 (2.76 x 1.77 x 0.28)
Voice Coil Ø	mm (in.)	38,6 (1.5)
Magnet	Neodymium	
Cone	Water repellent pressed paper	
Weight of one component	kg (lb.)	0,9 (1.98)

## ELECTRO-ACOUSTIC PARAMETERS

D	mm	128
Xmax	mm	1,5
Re	Ω	3,2
Fs	Hz	120
Le	mH	0,06
Vas	l	3,55
Mms	g	14,7
Cms	mm/N	0,15
BL	T·m	6,5
Qts		0,58
Qes		0,62
Qms		8,7
Spl	dB	97

1. Compact dimensions and light weight preserving excellent performance thanks to the use of Neodymium N38 H for the motor units
2. Cones waterproofing and anti-UV treatment to allow safe outdoor use without discoloration over time
3. Motor units treated with cataphoresis and insulated lead-wires to avoid oxidation
4. Terminals and mounting holes compatible for installation on Harley-Davidson motorbikes

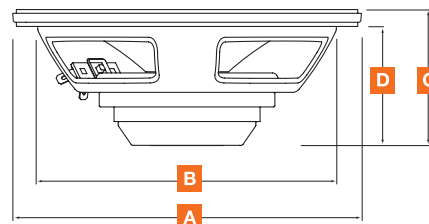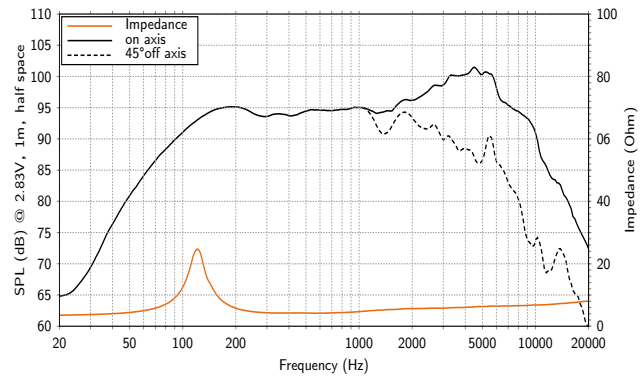

A	167,2 mm	6,58 in.
B	143,3 mm	5,64 in.
C	65,2 mm	2,57 in.
D	57,1 mm	2,25 in.