


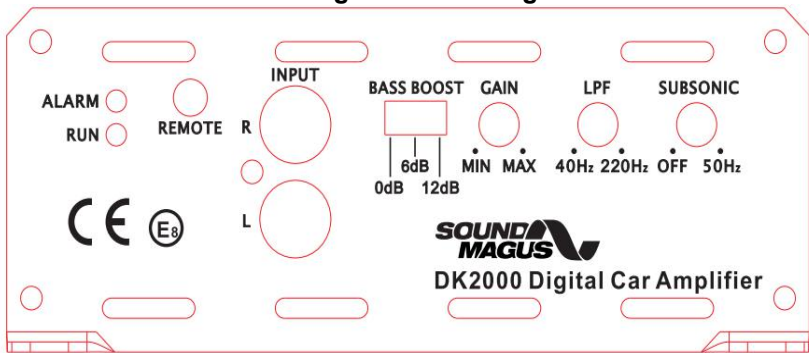

SOUNDMAGUS TECHNOLOGY CO.,LTD.

www.soundmagus.com

Email: market@soundmagus.com TEL: 0086-755-84528880 FAX:0086-755-84528881

Model No.	DK2000
Rated Continuous (RMS) Power @ 14.4 V	
4 Ω , $\leq 1\%$ THD+N	700W RMS X1
2 Ω , $\leq 1\%$ THD+N	1300W RMS X1
1 Ω , $\leq 1\%$ THD+N	2000W RMS X1
General Specifications	
Frequency Response	10HZ~220HZ(-3dB)
S/N Ratio @ Rated power	98dB (A-weighted)
S/N Ratio @ 1 W (CEA-2006)	75dB (A-weighted)
Operating Voltage:	9- 16V DC
THD+N @ Rated power	<0.8% @ 4 Ω
Auto Turn On	REM
Protection	Low voltage (protect < 8V), ShortCircuit, Overheat (Protect at 80C / 176F)
Input Sensitivity	0.2-5V (PRE INPUT)
Power / Ground Wire	4-2AWG
Fuse Rating	150A
Signal Processing 	
Filter Modes	
■ LPF ■ Subsonic	
Filter Frequency Range	Variable Subsoinc 10Hz-50Hz; 12dB filter slope
	Variable LPF 40Hz-220Hz; 24dB filter slope
Bass Boost	0-6db-12dB switchable
Remote Level Control	YES, optional
Channel Input Mode Switch	NO
Pass-Through Preamp Output Type	NO
Physical Specifications	
Height (H)	54 mm
Width (W)	140mm
Length (L)	338.5 mm