

## FREUDE

### FPK165

6.5" 2-Way Component Kit

Thank you for purchasing our company car speakers  
Please read this instructions carefully before using and make sure you know speaker connections very well.

#### Precautions


- Before making holes, check the mounting space with supplied template.
- To prevent noise pick-up, keep the wiring away from motors, high-voltage leads and other potential noise sources.
- To prevent a short-circuit, keep all wiring away from moving parts and sharp edges.
- Make sure you carefully read and understand the installation instructions before installing the system in your vehicle.

#### Technical Parameters


Maximum input power: 120W  
Rated input power: 60W  
Frequency Response: 62-20 kHz  
Sensitivity (2.83V/1M): 89dB  
Nominal Impedance: 4 Ohm

WF Cone material: paper with rubber surround  
WF Voice Coil: 1" wire copper  
WF magnet: 10oz high grade ferrite  
WF Basket: 6.5" steel with black painting  
TF Diaphragm: silk dome  
TF Voice Coil: 1" wire copper  
TF magnet: Neodymium

## Product Dimensions

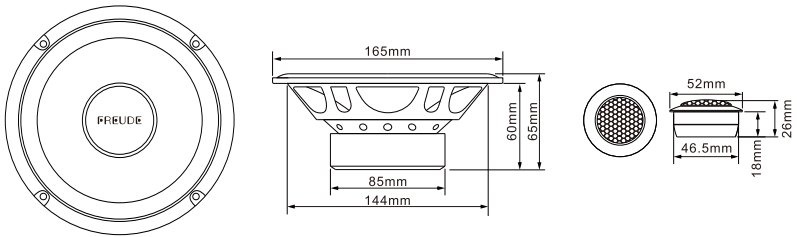

## Connection Method

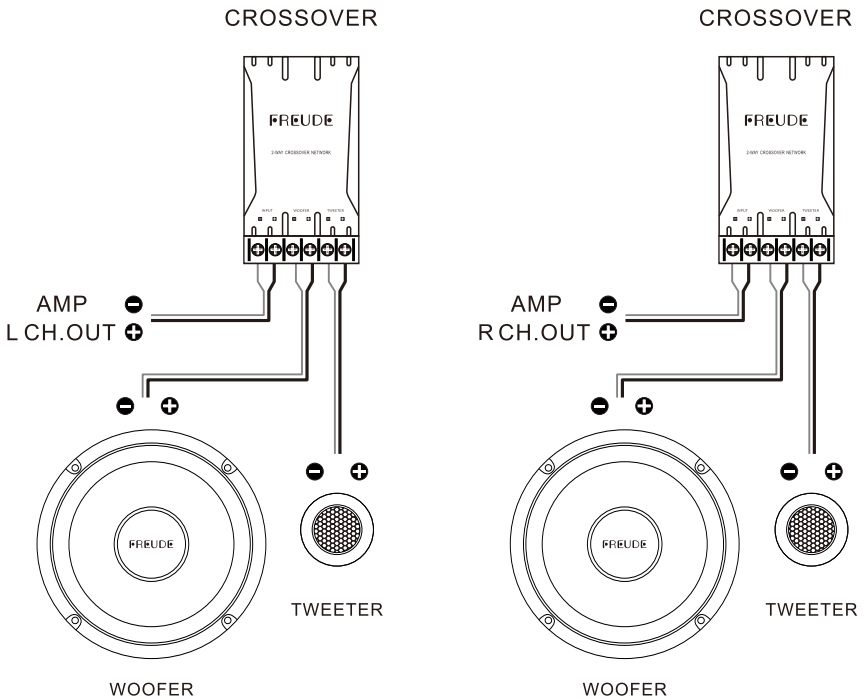

The contents of this manual and the specifications of this product are subject to change without notice. SICHERHEIT reserves the right to make changes to the specifications and materials contained therein without notice.